


## Series TP8300 SPECIFICATIONS

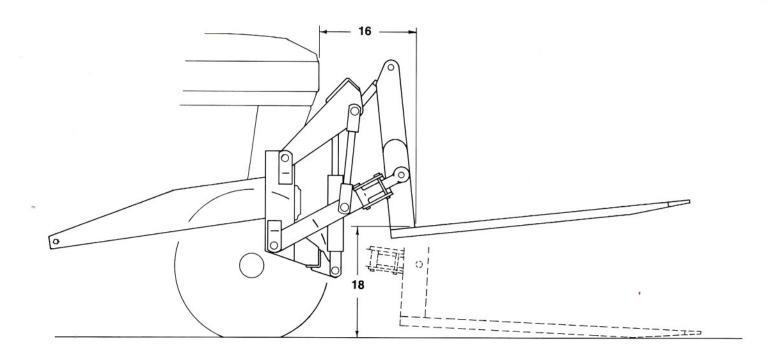

Maximum load at 24 inch load center
Hydraulic pressure required for maximum load
Ground clearance
Degrees tilt forward in lowered position
Degrees tilt rearward in raised position
Approximate shipping weight
Requires one spool four-way valve or one remote valve for operation.

<sup>\*</sup> This dimension will be different for each make and model of tractor. Specifications and design subject to change without notice.